

Ø	N	L (mm)																						
		lr (mm)																						
3/16	24	13	16	19	22	25	28	32																
		13	16	19	22	25	16	16																
1/4	20	13	16	19	22	25	28	32	38	44														
		13	16	19	22	25	18	18	20	18														
5/16	18	13	16	19	22	25	28	32	38	44	50	56	63											
		13	16	19	22	25	28	20	22	20	20	22	22											
3/8	16		16	19	22	25	28	32	38	44	50	56	63	70	76	82								
			16	19	22	25	28	22	22	22	22	25	25	25	25	25								
7/16	14				19	22	25	28	32	38	44	50	56	63	70	76	82	90	100					
					19	22	25	28	32	25	25	25	28	28	28	28	28	28	28					
1/2	12					22	25	28	32	38	44	50	56	63	70	76	82	90	100	110				
						22	25	28	32	28	28	28	32	32	32	32	32	32	32	36				
9/16	12						25	28	32	38	44	50	56	63	70	76	82	90	100	110	125			
							25	28	32	38	28	28	32	32	32	32	32	32	32	36	36			
5/8	11							28	32	38	44	50	56	63	70	76	82	90	100	110	125	140	155	175
								28	32	38	32	32	36	36	36	36	36	36	36	40	40	40	40	40
3/4	10								32	38	44	50	56	63	70	76	82	90	100	110	125	140	155	175
									32	38	44	36	40	40	40	40	40	40	40	45	45	45	45	45
7/8	9									38	44	50	56	63	70	76	82	90	100	110	125	140	155	175
										38	44	50	45	45	45	45	45	45	45	50	50	50	50	50
1	8										44	50	56	63	70	76	82	90	100	110	125	140	155	175
											44	50	56	50	50	50	50	50	50	56	56	56	56	56

MATERIAL: Acero tensión mínima de rotura a la tracción – 40 Kg / mm2
Alargamiento mínimo de rotura – 14%
Dureza HRB 63-88


Dimensiones: Según Normas IRAM 5036 y 5192

N= N° de filetes por pulgada

MATERIAL: Acero tensión mínima de rotura a la tracción – 40 Kg / mm²
Alargamiento mínimo de rotura – 14%
Dureza HRB 63-88

Dimensiones: Según Normas IRAM 5036 y 5192

N= N° de filetes por pulgada

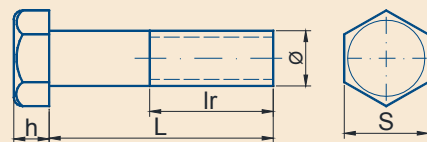

Ø	N	L(mm) lr(mm)			h (mm)	S (m)	
3/16	24				3	+0.5 -0	9 +0 -0.35
1/4	20				4	+0.6 -0	11 +0 -0.4
5/16	18				5	+0.7 -0	12.5 +0 -0.45
3/8	16				6	+0.8 -0	14 +0 -0.5
7/16	14				7	+0.9 -0	17 +0 -0.55
1/2	12				8	+1 -0	19 +0 -0.5
9/16	12				9	+1.1 -0	22 +0 -0.65
5/8	11	200	225	250	10	+1.2 -0	24 +0 -0.7
		40	45	45			
3/4	10	200	225	250	12	+1.4 -0	27 +0 -0.8
		45	50	50			
7/8	9	200	225	250	14	+1.6 -0	32 +0 -0.9
		50	56	56			
1	8	200	225	250	16	+1.8 -0	36 +0 -1
		56	63	63			

Recubrimiento: Cincado por inmersión en caliente

Por otras dimensiones o características técnicas – consultar – buloneskc@industriaskc.com