
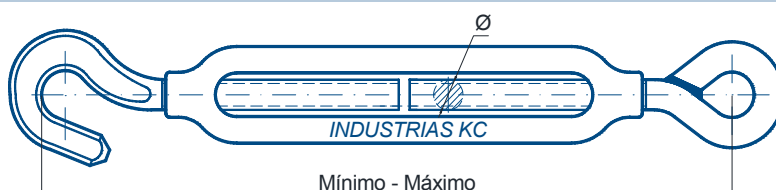


TENSOR

Material Normalizado

CODIGO	Ø	Alcance (mm)		Peso (Kg)
		Mínimo	Máximo	
KCTOO-1130	1/2	318	448	0.780
KCTOG-1130				0.780
KCTOH-1130				0.900
KCTHH-1130				1.100
KCTOO-2180	5/8	410	590	1.470
KCTOG-2180				1.470
KCTOH-2180				1.700
KCTHH-2180				1.820
KCTOO-3210	3/4	450	660	2.100
KCTOG-3210				2.280
KCTOH-3210				2.320
KCTHH-3210				2.560
KCTOO-4215	7/8	470	685	3.900
KCTOH-4215				4.100
KCTHH-4215				4.250
KCTOO-5280	1	545	825	5.510
KCTOH-5280				6.180
KCTHH-5280				6.740



		
O = Ojo	G = Gancho	H = Horquilla
Material	Cuerpo: Fundición Nodular Pasador Elástico: Latón Resto de componentes: Acero F-24	
Recubrimiento	Cincado por inmersión en caliente	
a)- El tensor –sobre pedido, se entrega con contra tuerca b)- Los tensores con horquilla (KCTOH-KCTHH), sobre pedido, se proveen con bulón, tuerca y pasador elástico		

Por dimensiones, características técnicas o modelos no indicados – consultar – ventas@industriaskc.com

